





catalogo ■ catalogue ■ katalog


Multiple control connectors

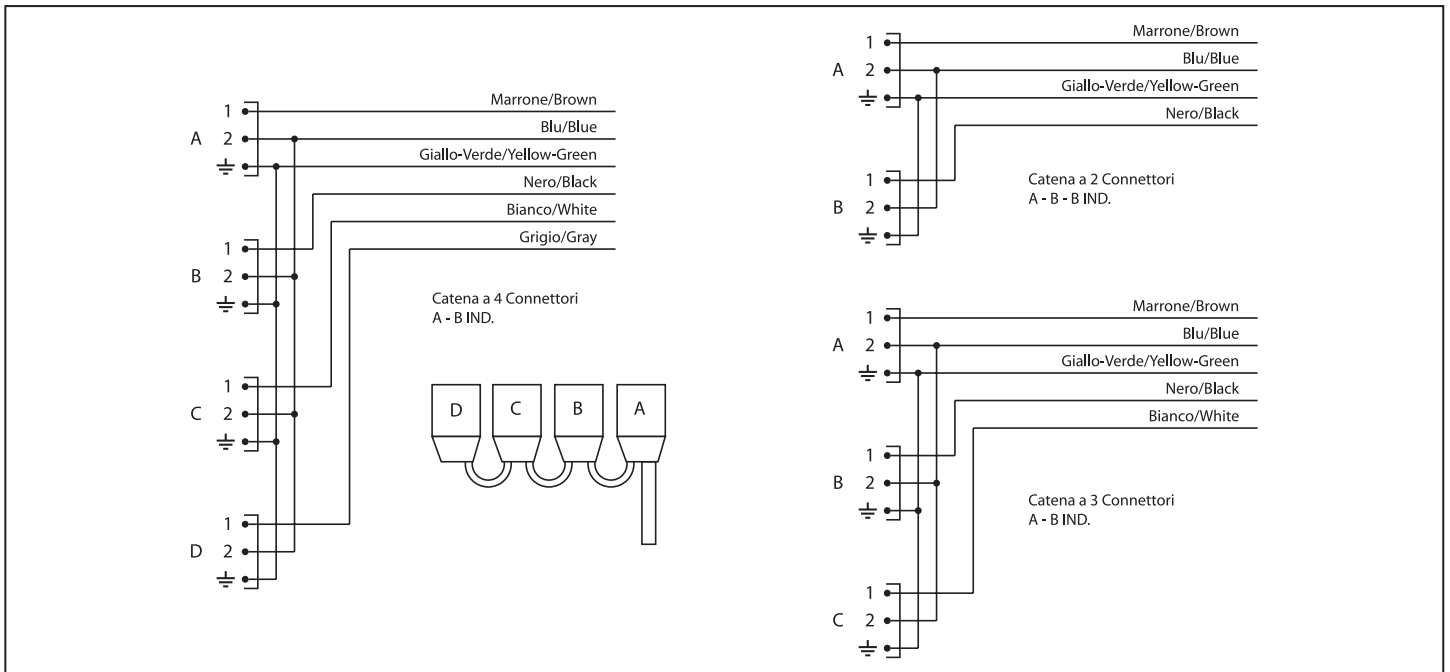

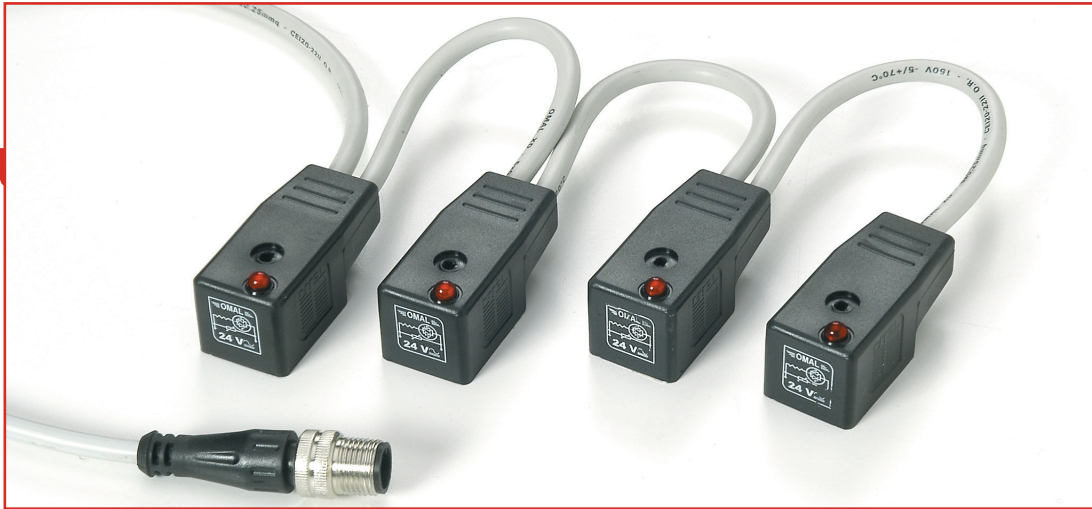

Corpo connettore Connector Stecker	Resina poliammidica (V0) PA Resin (V0) PA Harz (V0)	Grado di protezione Protection class Schutzart	IP65 EN 60529 (DIN 40050)
Contatti Contact material Kontaktmaterial	CuZn (Au)/ CuZn (Ag)	Temperatura di funzionamento Working temperature Betriebstemperatur	-25 °C / +90 °C
Portata massima contatti Max. current Max. Strom	4 A	Classe di isolamento Insulation class Isolierungsklasse	C - VDE 0110
Tensione nominale (max.) Max voltage Max. Spannung	Secondo circuito According to circuitry nach Beschaltung		

Per il codice d'ordine dei connettori illustrati contattare l'ufficio vendite.
For part numbers, please contact us.
Für Bestell nummer, bitte, kontaktieren Sie uns.

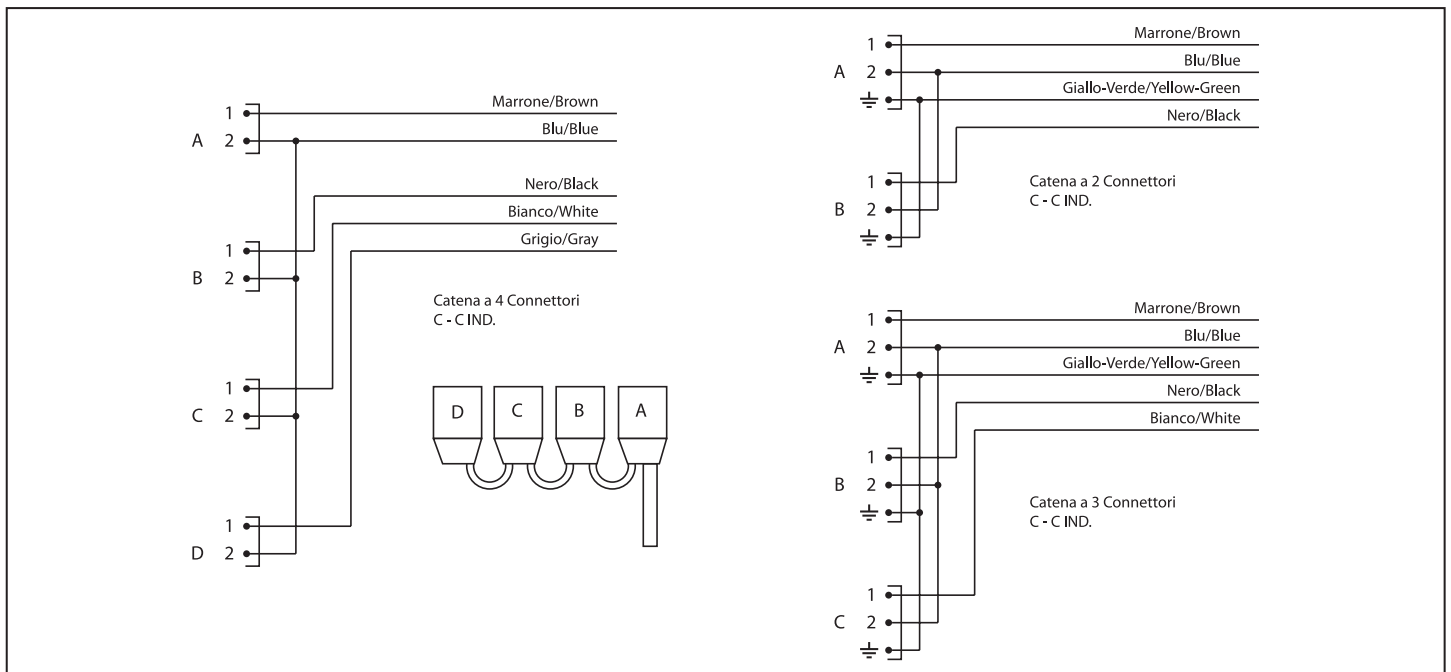


Corpo connettore Connector Stecker	Resina poliammidica (V0) PA Resin (V0) PA Harz (V0)	Grado di protezione Protection class Schutzart	IP65 EN 60529 (DIN 40050)
Contatti Contact material Kontaktmaterial	CuZn (Au)/ CuZn (Ag)	Temperatura di funzionamento Working temperature Betriebstemperatur	-25 °C / +90 °C
Portata massima contatti Max. current Max. Strom	4 A	Classe di isolamento Insulation class Isolierungsklasse	C - VDE 0110
Tensione nominale (max.) Max voltage Max. Spannung	Secondo circuito According to circuitry nach Beschaltung		

Per il codice d'ordine dei connettori illustrati contattare l'ufficio vendite.
For part numbers, please contact us.
Für Bestellnummer, bitte, kontaktieren Sie uns.




catalogo ■ catalogue ■ katalog

Connection boxes

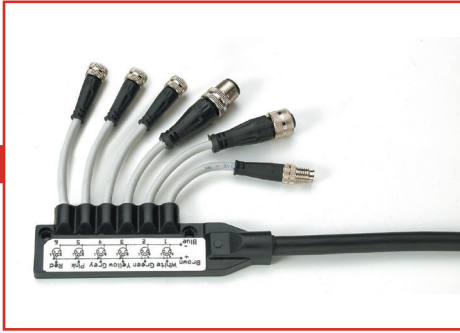



SPLITTER 6

Tensione nominale (max.) Max voltage Max. Spannung	60 V AC/DC
Portata massima contatti Max. current Max. Strom	3 A
Portata massima cavo Max. cable current Kabel Max. Strom	4 A

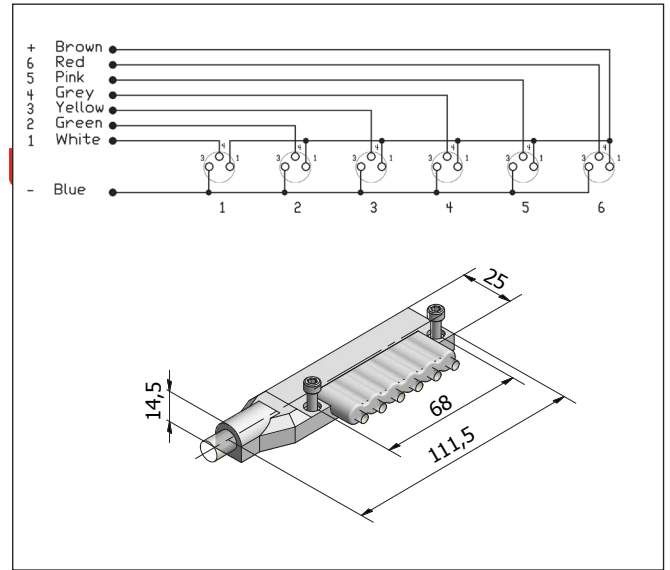


SPLITTER 8


Tensione nominale (max.) Max voltage Max. Spannung	60 V AC/DC
Portata massima contatti Max. current Max. Strom	3 A
Portata massima cavo Max. cable current Kabel Max. Strom	4 A

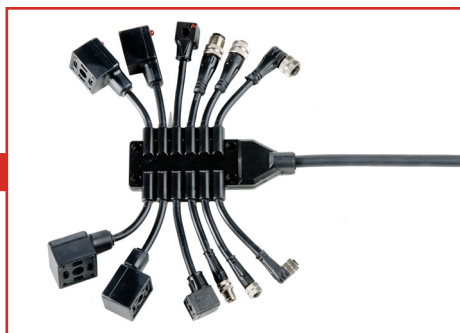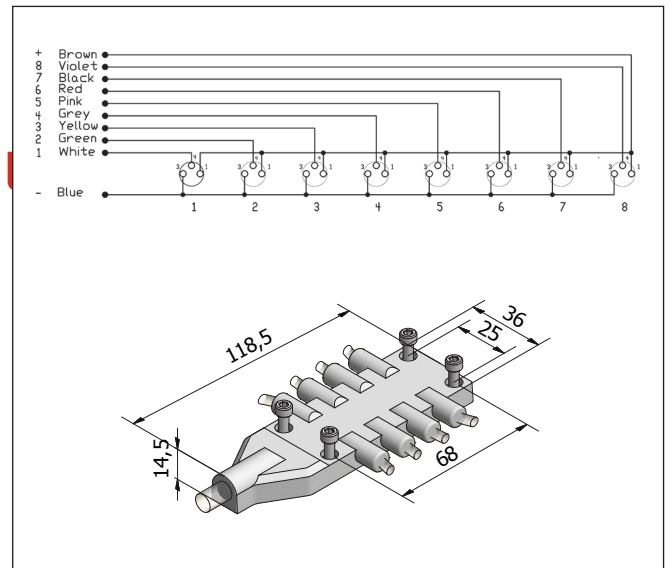

SPLITTER 12

Tensione nominale (max.) Max voltage Max. Spannung	60 V AC/DC
Portata massima contatti Max. current Max. Strom	3 A
Portata massima cavo Max. cable current Kabel Max. Strom	4 A

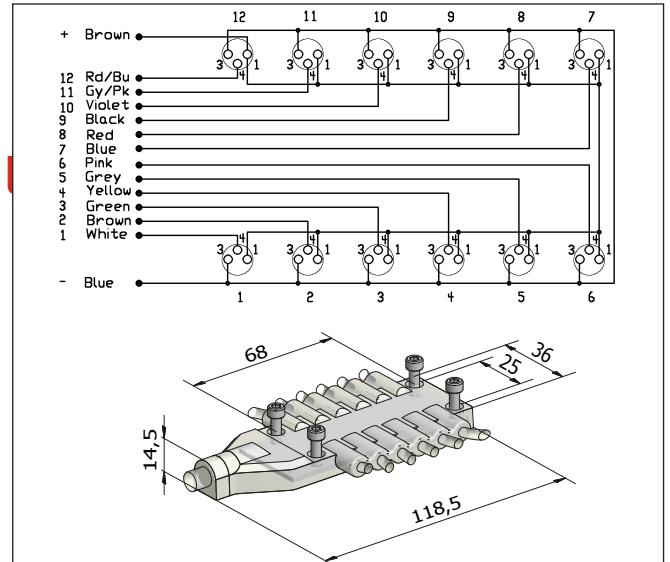

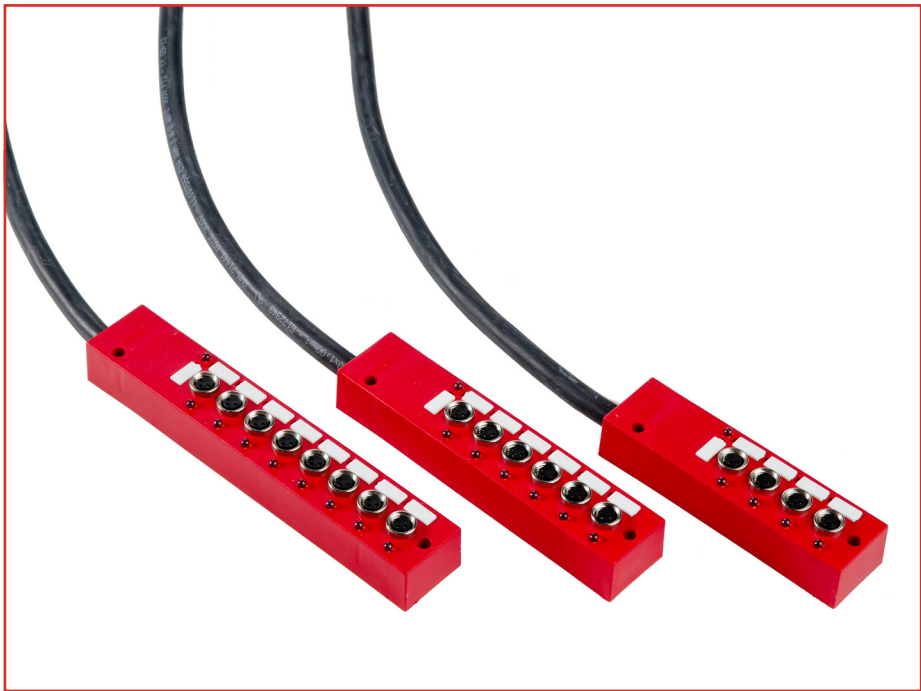


CD M8

M8

4 - 6 - 8 connections

Contatti Contact material	CuZn(Au)
Tensione nominale (max.) Max voltage Max.Spannung	10-30 V AC/DC
Portata max. contatti Max. current Max. Strom	4 A
Logica Logic Bauart	PNP

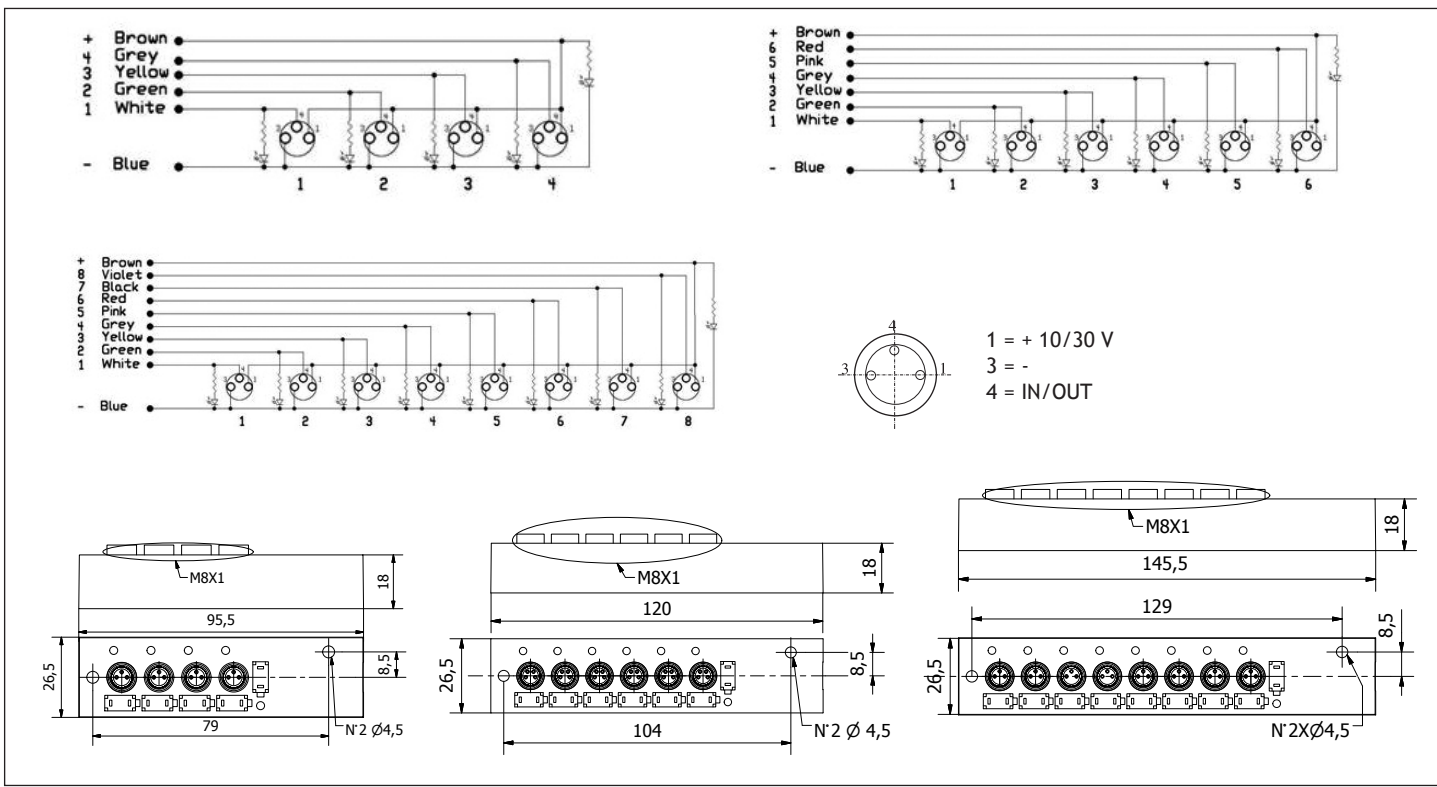

Codici ordine/Codification/Bestellschlüssel



Lunghezza: **dm**/Lenght: **dm**/Länge: **dm**

- Cavo**
- XPH** 4-6 connections
 - XRN** 8 connections

- 4** 4 Connections
- 6** 6 Connections
- 8** 8 Connections








M12

CD M12



4 - 6 - 8 connections

Contatti Contact material Kontaktmaterial	CuZn(Au)
Tensione nominale (max.) Max voltage Max. Spannung	10-30 V AC/DC
Portata max. contatti Max. current Max. Strom	4 A
Logica Logic Bauart	PNP

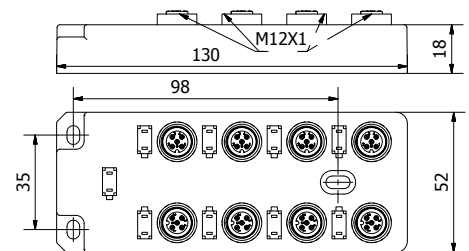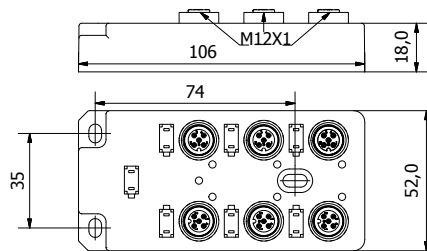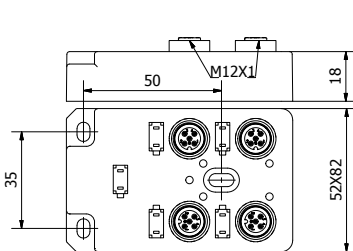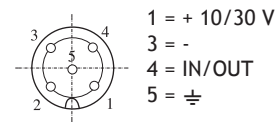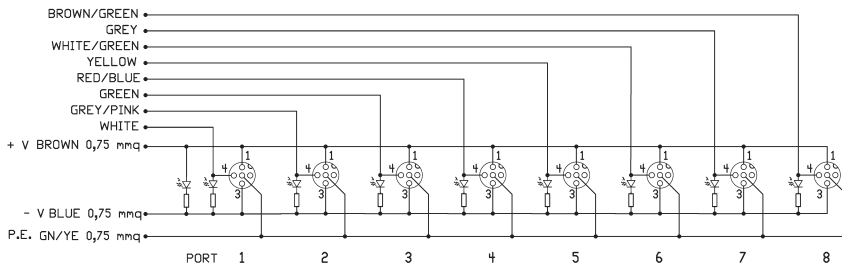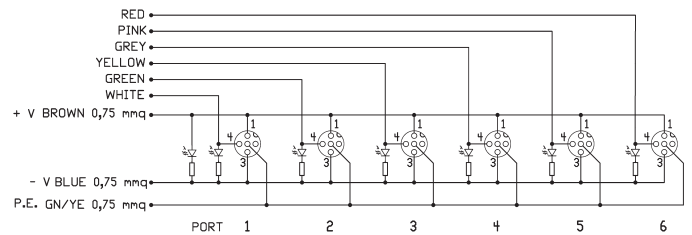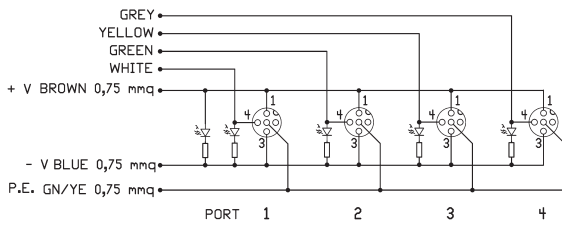

Codici ordine / Codification / Bestellschlüssel



Lunghezza: **dm** / Lenght: **dm** / Länge: **dm**

Cavo

LDB 4 connections

LDC 6 connections

LDE 8 connections

4 4 Connections

6 6 Connections

8 8 Connections




CD M12 2S

M12

4 - 6 - 8 connections
Doppio segnale/Double signal/Doppeltels signal

Contatti Contact material Kontaktmaterial	CuZn(Au)
Tensione nominale (max.) Max voltage Max. Spannung	10-30 V AC/DC
Portata max. contatti Max. current Max. Strom	4 A
Logica Logic Bauart	PNP

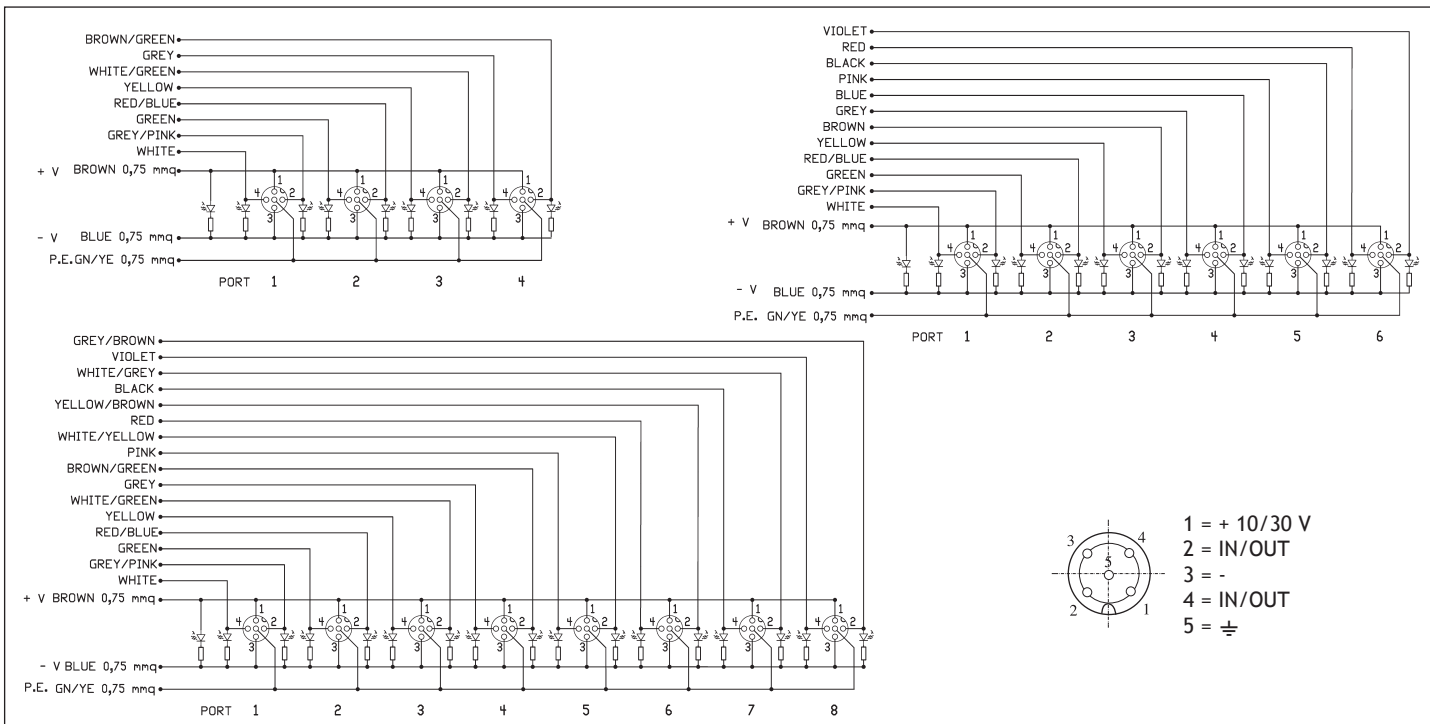

Codici ordine/Codification/Bestellschlüssel

C D M 1 2 2 S

Lunghezza: **dm**/Lenght: **dm**/Länge: **dm**

Cavo

LDE	4 connections
LDF	6 connections
LDG	8 connections

4	4 Connections
6	6 Connections
8	8 Connections